


- Load limiter device in lifts and elevators.
- No need to introduce a well-known weight for its adjustment.
- Three relays for three levels of selectable alarms.
- Connection system for up to 10 load cells of 350Ω.
- Input for temporary inhibition of measure.
- Chain compensation.
- Fixing with screws or DIN rail.

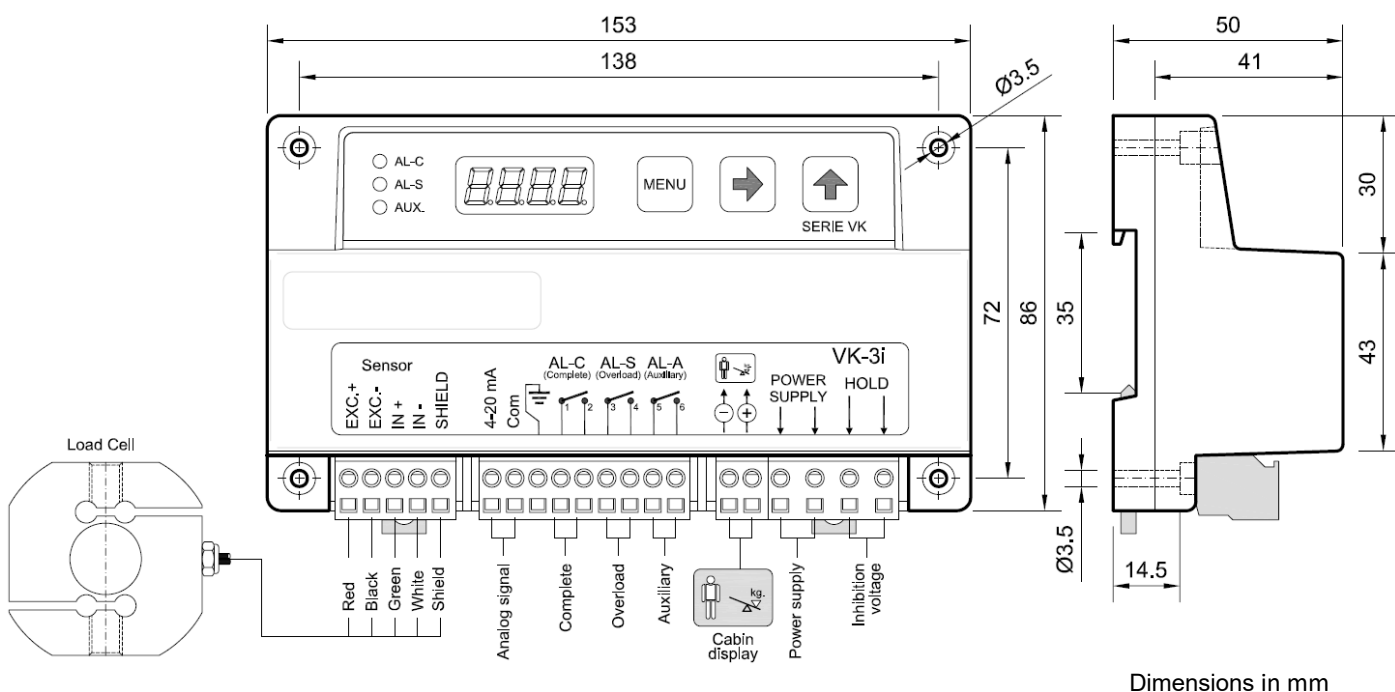

### Technical characteristics

Power supply	115 VAC ó 230 VAC 50-60 Hz - maximum 5W	Cabin display output (Buzzer) Programable working mode.	MB (2 without polarity) Or 9V intermitent
Number of alarms	3	Programation	By keyboard
Relay contact	250V / 3A	User Interface	Display 4 digits & 3 keys
Hold inhibition input	24 ... 230 VAC/VDC	Analog output	YES
Acuracy	0.1% F.S.	Housing material	Fire proof ABS
Temperature range	-10 ... 60 °C	Protection class	IP-50